

LIFTING EQUIPMENT

KIT Available See pg. 18





MOBILE-PENDANT FIXING (with WALL BRACKET accessories) WALL FIXING

Characteristics:

- Compact and modern design
- Bi-directional, mechanically interlocked
- IP 65 double insulation IEC/EN60529
- General and electrical data page 23
- Laser engraved symbols comply with EN60204-1, FEM 9.941
- Contact block with spring cage terminal
- Shock proof and heat resistant
- Mobile-Pendant (with wall bracket accessories) or wall fixed mounting

CODE	TLP1-EPP	TLP1-ESR	TLP2	TLP3-B	TLP3-D	TLP4-E	TLP4-C
------	----------	----------	------	--------	--------	--------	--------

weight [gr.]	120	120	200	255	255	314	314
N° push button	1	1	2	3	3	4	4
L length [mm]	80	80	115	150	150	185	185

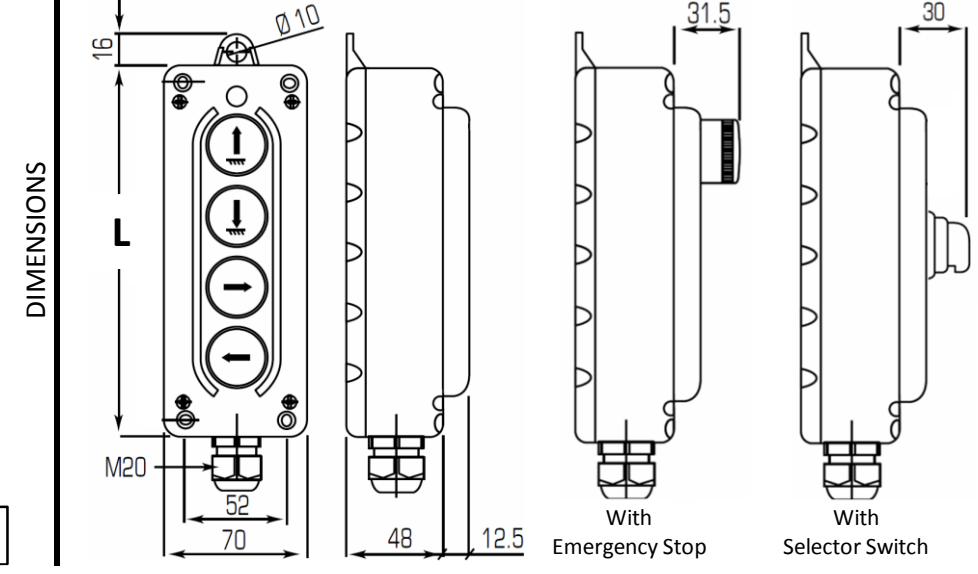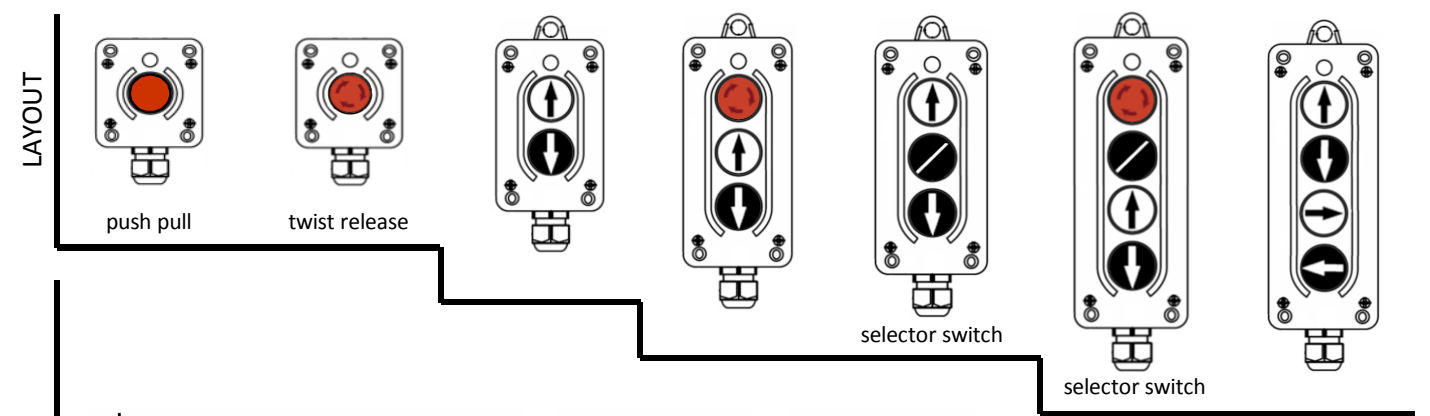

PUSH BUTTON TYPE			
CONTACT TYPE COUPLED			